



1. Determine the shape of your toilet seat


There are three common toilet seat shapes. Tick the box for the one you already have.

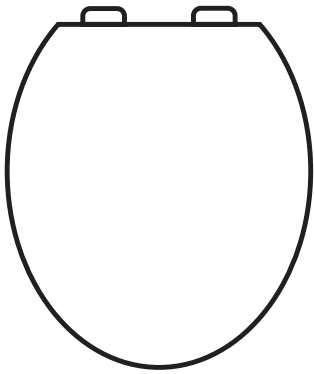

'O' shape ☐

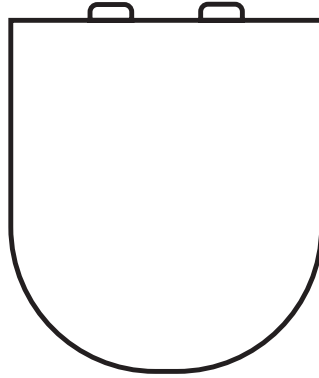

'D' shape ☐

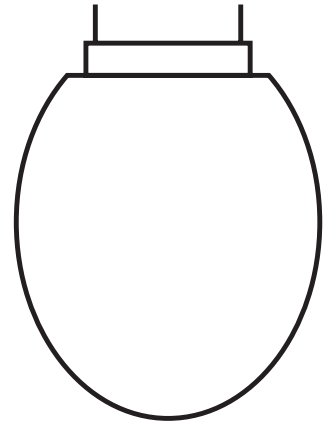

Link suite ☐

2. Check whether you require top or bottom fixing



Top fixing ☐

Top fixing toilet seat hinges work by inserting two bolts into the toilet pan and tightening them from above, much like how a wall plug secures in a drilled hole. If you can't access the underside of the toilet or see the fixings shown to the right, then you'll need a top fixing toilet seat.




Bottom fixing ☐

Bottom fixing toilet seat hinges use the traditional method: two bolts are dropped through the pan and tightened from underneath, often with wing nuts. If you can reach behind the toilet and feel the bolts, you'll need a bottom fixing toilet seat.


3. Measure your pan dimensions

1. Side to side
(outside)

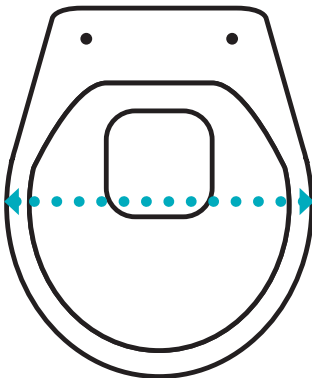


..... mm

2. Side to side
(inside)

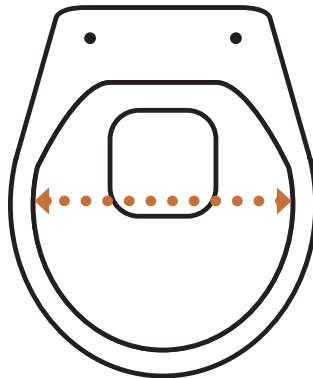


..... mm

3. Back to front of
pan (inside)

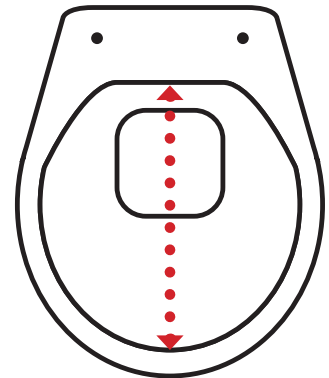


..... mm

4. Fixing point to
fixing point

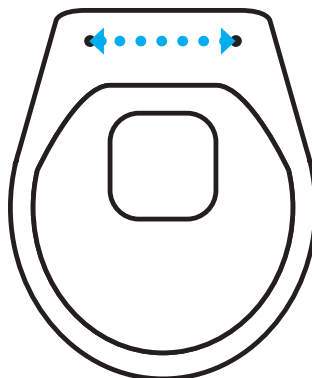


..... mm

5. Centre of hole to
front of pan

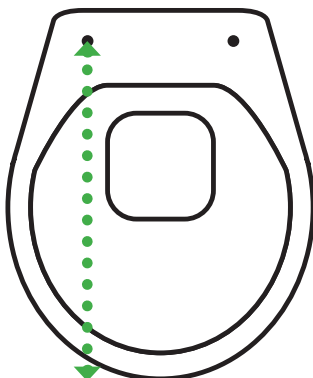

..... mm

FOR LINK SUITES ONLY:
Measure the width of the link

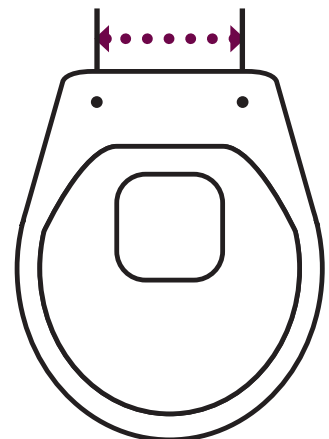

..... mm

4. Note the brand and model (if known) of your toilet suite

Brand:

Model:

5. Choose a replacement toilet seat

Visit us in store with these measurements and we'll find the right toilet seat to suit your needs. Alternatively, browse our range online at **spplus.com.au**.